


ER12-100-230V

1 NO contact potential free 16 A/250 V AC, 230 V LED lamps up to 200 W, incandescent lamp load 2000 W. No standby loss.

Modular device for DIN-EN 60715 TH35 rail mounting.
1 module = 18 mm wide, 58 mm deep.
Control voltage 230 V AC at control input A1/A2.
Very low switching noise.
Same terminal connection as the electromechanical switching relay R12-100-.

ER12-100-230V	Switching relay, 1 NO contact 16 A	**Art. No. 22100000**	**28,20 €/pc.**

Typical connection

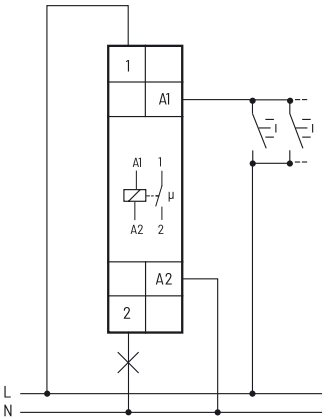

Manuals and documents in further languages:
https://eltako.com/redirect/ER12-100-230V

Technical data page 12-19.
Housing for operating instructions GBA14 page 1-48 chapter 1.

Recommended retail prices excluding VAT.