

MFZ12DX-230V

1 CO contact potential free 10 A/250 V AC. 230 V LED lamps up to 200 W, incandescent lamps 2000 W*. Standby loss 0.4 watt only.


Modular device for DIN-EN 60715 TH35 rail mounting. 1 module = 18 mm wide, 58 mm deep.
With the patented ELTAKO Duplex technology (DX) the normally potential-free contacts can still switch in zero passage when switching 230 V AC 50 Hz and therefore drastically reduce wear. Simply connect the neutral conductor to the terminal (N) and L to 15 (L) for this. This gives an additional standby consumption of only 0.1 Watt.
Supply and control voltage 230 V AC.
Time setting between 0.1 second and 40 hours.
By using a bistable relay coil power loss and heating is avoided even in the on mode.
The switched consumer may not be connected to the mains before the short automatic synchronisation after installation has terminated.
Functions F (description page 13-21)

RV = off delay
AV = operate delay
TI = clock generator starting with impulse
TP = clock generator starting with pause
IA = impulse controlled operate delay (e.g. automatic door opener)
EW = fleeting NO contact
AW = fleeting NC contact
ARV = operate and release delay
ON = permanent ON
OFF = permanent OFF


The LED below the big rotary switch indicates the contact position while time-out is in progress. It blinks while the relay contact 15-18 is open (15-16 closed), and is continuously ON as long as the relay contact 15-18 is closed (15-16 open).
The time base T is selected by means of the middle, latching rotary switch **T.** Time-base figures available are 0.1 seconds, 0.5 seconds, 2 seconds, 5 seconds, 1 minute, 2 minutes, 5 minutes, 1 hour, 2 hours and 4 hours. The total time is obtained by multiplying the timebase by the multiplier.
The multiplier xT is set on the upper, latching rotary switch **xT** and is in the range from 1 to 10. Thus, time settings can be selected in the range from 0.1 second (time base 0.1 second and multiplier 1) and 40 hours (time base 4 hours and multiplier 10).

* The maximum load can be used starting at a delay time or clock cycle of 5 minutes.
The maximum load will be reduced for shorter times as follows: up to 2 seconds 15%, up to 2 minutes 30%, up to 5 minutes 60%.

Function rotary switches

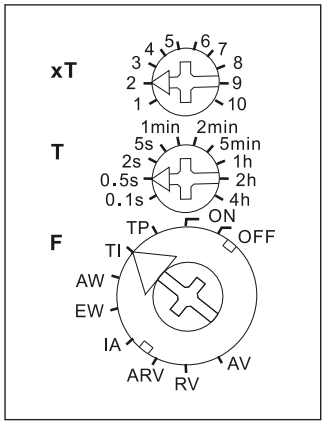

Typical connection

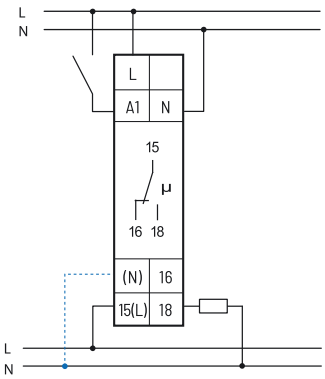

If (N) is connected, the zero passage switching is active.

Manuals and documents in further languages:
https://eltako.com/redirect/MFZ12DX-230V

Technical data page 13-22.
Housing for operating instructions GBA14 page 1-48 chapter 1.

MFZ12DX-230V	Analogue settable multifunction time switch 1 CO contact 10 A	**Art.-Nr. 23001007**	**45,93 €/pc.**