




Typical connection

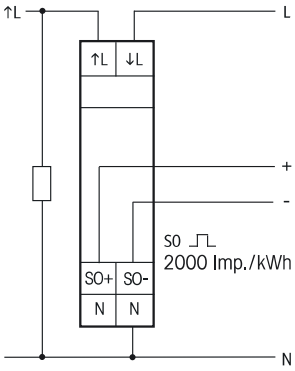

Manuals and documents in further languages:
https://eltako.com/redirect/WSZ15D-32A_MID

Technical data page 10-34.

WSZ15D-32A MID

MID

MID-compliant and therefore approved for use for billing purposes.
Maximum current 32 A. Standby loss 0.4 watt only.

Modular device for DIN-EN 60715 TH35 rail mounting.
1 module = 18 mm wide and 58 mm deep.
Accuracy class B (1%). With S0 interface.
This single-phase energy meter measures active energy by means of the current between input and output. The internal power consumption of 0.4 watt active power is neither metered nor indicated.
1 phase conductor with a max. current of up to 32 A can be connected.
The start current is 20 mA.
If the anticipated load exceeds 50%, maintain an air gap of ½ pitch unit to the devices mounted adjacently. If necessary, use spacer DS12.
Two N terminals for secure cross wiring of several counters.
The 7 segment LC display is also legible twice within a period of 2 weeks without power supply.
Press the button.
Below the displays is a button which you can use to browse through the menu as described in the User Manual. First the **background lighting** switches on. Then you can display the total active energy, active energy of the resettable memory and the instantaneous values for active power, voltage and current. Power consumption is shown by a bar flashing at a rate of 1000 times per kWh.
Error message
In the event of a connection error the backlighting of the display flashes.

WSZ15D-32A MID	Single-phase energy meter, MID approval	**Art. No. 28032015**	**71,02 €/pc.**