

Manuals and documents in further languages:
https://eltako.com/redirect/NR12-002-3*230V


Technical data page 14-9.
Housing for operating instructions GBA14 page 1-48 chapter 1.

NR12-002-3X230V

2 CO contacts potential free 10 A/250 V AC. 230 V LED lamps up to 200 W, incandescent lamp load 2000 W. Standby loss 0.8 watt only.


Modular device for DIN 60715 TH35 rail mounting. 2 modules = 36 mm wide, 58 mm deep.
All functions same as NR12-001-3x230V but with a second CO contact.
Maximum fusing 16 A.

Typical connections: 1 phase monitoring

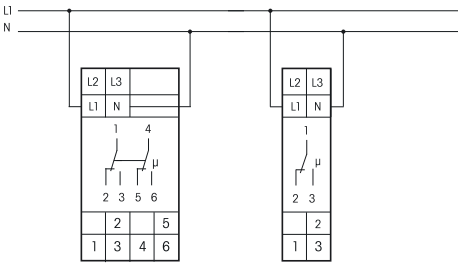

NR12-002-3x230V NR12-001-3x230V

Typical connections: 3 phase monitoring

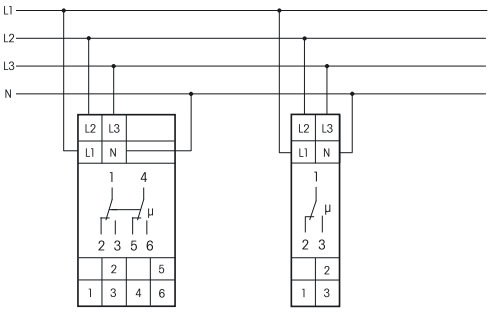

NR12-002-3x230V NR12-001-3x230V

NR12-002-3x230V	Mains monitoring switch monitoring the rotating field, 2 CO contact 10 A	**Art. No. 22002330**	**80,23 €/pc.**

Recommended retail prices excluding VAT.